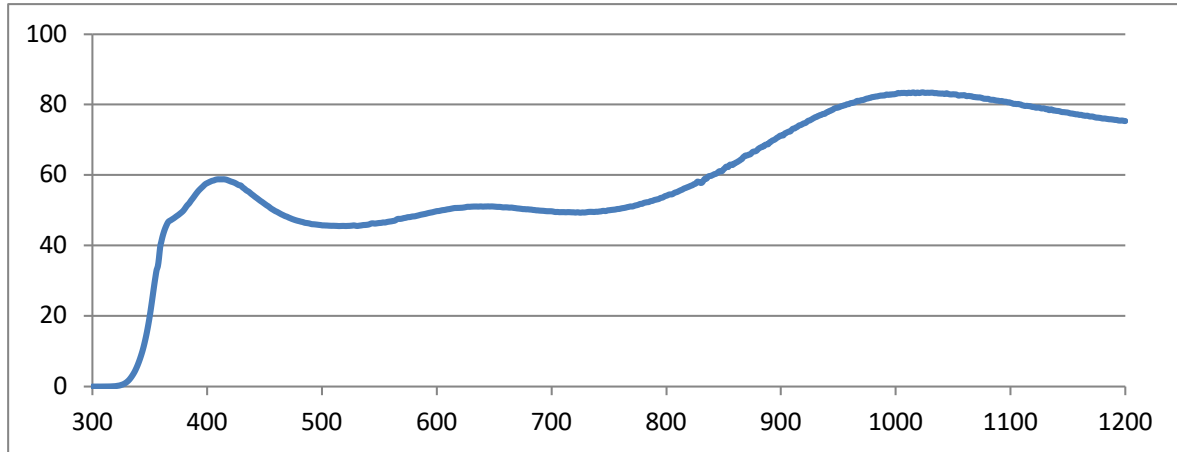


**DATA SHEET**
**Beamsplitter 0°**

**OPTICAL SPECIFICATION:**

OPTICAL SPECIFICATION 0°	
WAVELENGTH (NM)	TRANSMISSION (%)
420-680nm	Tavg=50%+/-5%

Wave.	T%	Wave	T%	Wave	T%	Wave	T%	Wave	T%
300	-0.011	410	58.835	510	45.642	610	50.34	710	49.513
310	0	420	58.296	520	45.584	620	50.725	720	49.431
320	0.113	430	56.862	530	45.615	630	51.064	730	49.454
330	1.288	440	54.305	540	45.955	640	51.086	740	49.615
340	6.564	450	51.888	550	46.429	650	51.091	750	50.038
350	20.074	460	49.718	560	46.883	660	50.88	760	50.5
360	41.042	470	48.145	570	47.699	670	50.584	770	51.111
370	47.581	480	46.967	580	48.306	680	50.298	780	52.049
380	50.243	490	46.202	590	49.013	690	49.944	790	52.983
390	54.567	500	45.772	600	49.785	700	49.753	800	54.155
400	57.747	410	58.835	510	45.642	610	50.34	710	49.513