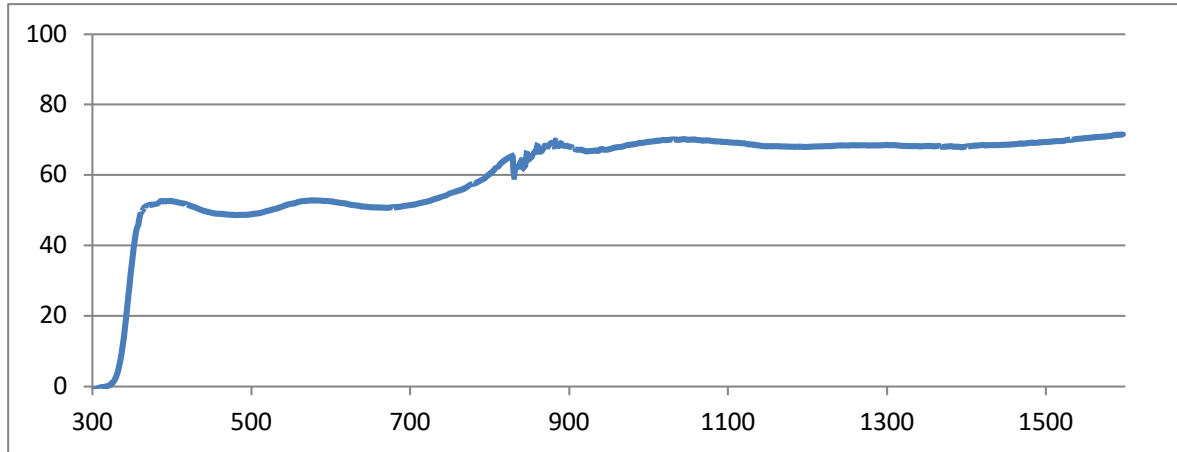


DATA SHEET

Beamsplitter 45°


OPTICAL SPECIFICATION:

OPTICAL SPECIFICATION 45°	
WAVELENGTH (NM)	TRANSMISSION (%)
420-680nm	Tavg=50%+/-5%

Wave.	T%	Wave	T%	Wave	T%	Wave	T%	Wave	T%
300	-1.359	410	52.112	510	49.276	610	52.217	710	51.855
310	-0.453	420	51.569	520	49.936	620	51.903	720	52.447
320	0.254	430	50.848	530	50.567	630	51.433	730	53.107
330	2.906	440	49.795	540	51.184	640	51.076	740	54
340	14.683	450	49.428	550	51.873	650	50.94	750	54.852
350	35.499	460	49.016	560	52.351	660	50.825	760	55.538
360	48.715	470	48.902	570	52.676	670	50.774	770	56.464
370	51.803	480	48.633	580	52.807	680	50.955	780	57.673
380	52.068	490	48.665	590	52.819	690	51.193	790	58.721
390	52.533	500	48.906	600	52.566	700	51.442	800	60.165
400	52.579	410	52.112	510	49.276	610	52.217	710	51.855